


MATERIAL	HEAD	Ø mm
B	1	2,30
B S	2	1,80
B	3	0,80 1,00 2,50
B	4	3,00
B S	8	3,00

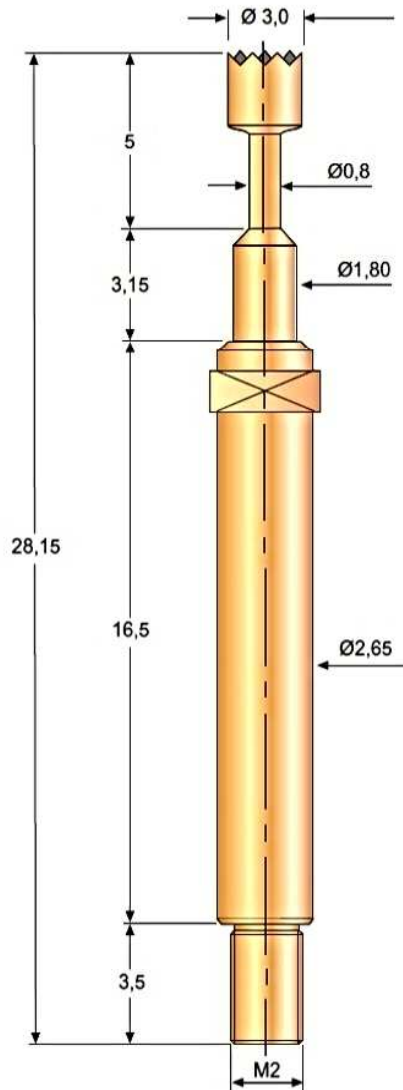


Technical Data

Recommended Minimum Centers: 2,54 mm
 Current Rating: 5,0 - 8,0 A
 Typical Contact Resistance: 30 m Ω
 Recommended Working Travel : 4,0

Materials

Barrel : Gold plated
 Spring : Music Wire, silver / gold plated
 Plunger : Becu, hardened 24 Kt gold plated

GLR-33M Receptacle

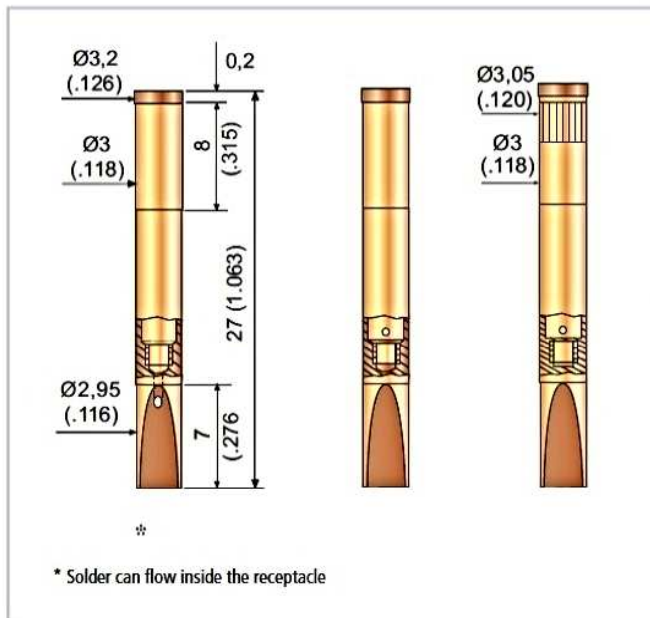

Max Travel :	5,3 mm.
Spring Force :	300 gr.
Preload :	?? gr.
Options :	1??? g.

Drills:

GLR-33M	
---------	--

C = Crimp
 S = Saldare
 W = Wire wrap
 WW = With wire