


MATERIAL	HEAD	Ø mm
B	1	2,30
B	3	2,30 3,00
P	3P	3,00
B	08	2,30 3,00

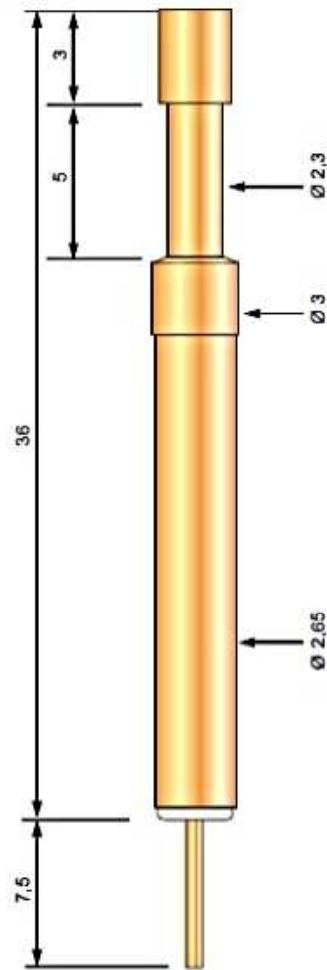

Technical Data


Recommended Minimum Centers: 3,58 mm
 Current Rating: 3,0 A
 Typical Contact Resistance: 50 m Ω
 Recommended Working Travel : 4,00 mm

Materials

Barrel : Gold plated
 Spring : Music Wire, silver / gold plated
 Plunger : Becu, hardened 24 Kt gold plated

GLR-SW3

Receptacle

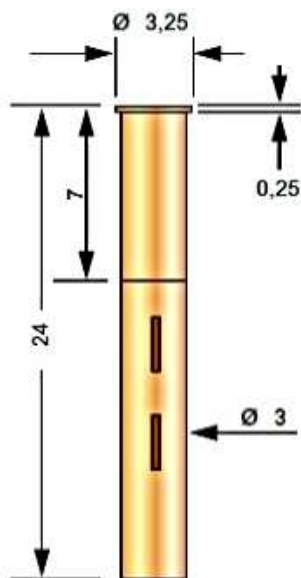

Corsa Max : 5,00 mm.
 Max Travel :
 Spring Force : 200-300 gr.
 Preload : 65 gr.

Drills:



GLR-SW3	
---------	--

C = Crimp
 S = Saldare
 W = Wire wrap
 WW = With wire