


GLP 503

CONTINUOUS PLUNGER

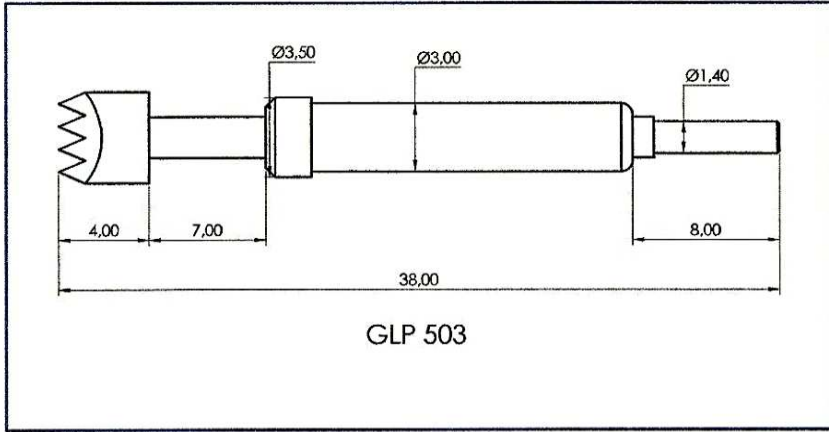

Materials


Barrel: Brass, Gold plated
 Spring: Music Wire, Silver or Gold plated
 Plunger: Steel or Hardened Beryllium copper,
 Gold over Hard Nickel

Technical Data


Recommended Minimum Centers: 4,00 mm
 Current Rating: 5,0-8,0 A
 Typical Contact Resistance: <30 mΩ
 Recommended Working Travel: 5,60 mm
 Max Travel: 7,00 mm
 Spring Force: 300g - 500g

Ø mm	4,00	1,80	1,80	4,00	4,00	2,30
Head						
Material	B	S	S	B	B	B


Receptacle GLR 503

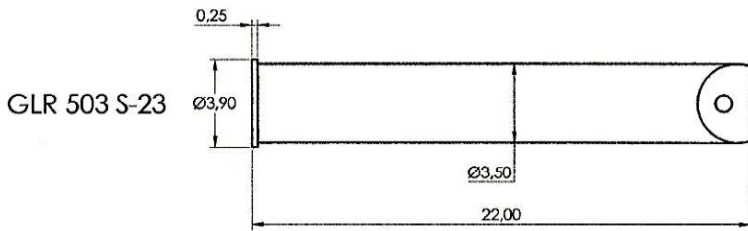

D 503 05



D 503 03



D 503 02



Drills: Ø 3,48 - 3,49

ORDERING EXAMPLE:

GLP 503	B	10	400	300	G
Model	Material	Tip Style	Tip Diameter	Spring Force	Plating

Order info:
 Material Plating
 B=BeCu G=Gold
 S=Steel N=Nickel

GENTEC TEST
 ZA Les Sablons
 F 77230 Dammartin en Goële
 Tel: +33 1 60 27 07 76 / +33 1 60 03 91 91
 Fax: +33 1 60 03 91 70
 Web: www.gentec-test.com
 e-mail: sales@gentec-test.com

Dimensions in Millimeters
 Additional configurations on request - Specifications subject to change